


2 pickups, 2 x Volume version.

Gain.

9V battery connector

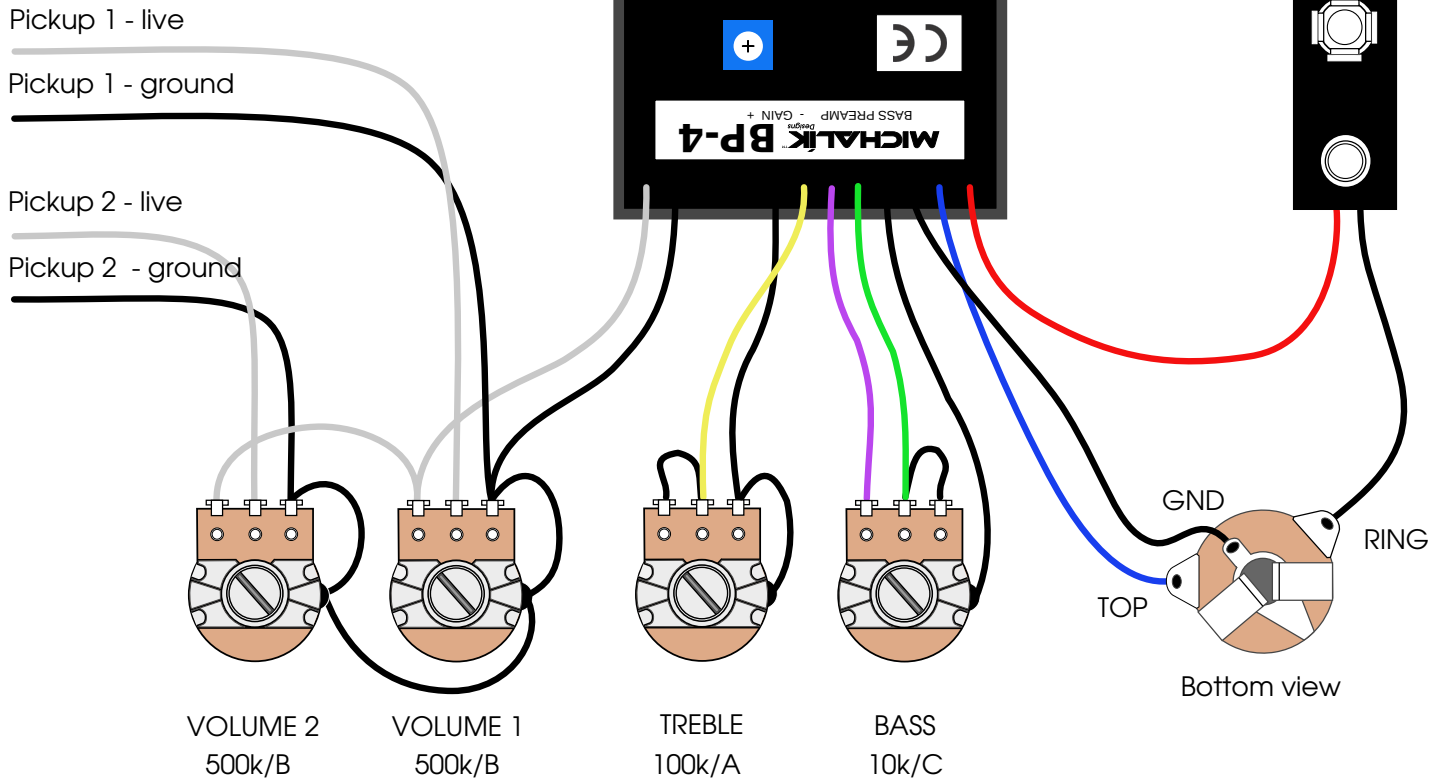

*) For passive pickups. For active pickups, 2 x 25k/B or 2 x 50k/B is recommended.